


## Ultralux



### Product Information

Description	Wide distribution Low bay/ High Bay Luminaire
Construction	Australian made acrylic injection moulded refractor, polyester powder coated finish die cast aluminium
Mounting	Mounting heights from 4 metres
Dimensions L x W x H	820cm x 740cm
Mounting	Hook Suspension
Diffuser	Acrylic
Colour Temperature	5000K
CRI	85
Lamps	Metal Halide 350W Pulse Start
Operating Voltage	240V Mains Supply
Power Consumption	350W ( 250W – 400W also available)
IP Rating	IP65
Operating Temperature	-30° - +68°
C-Tick	N29688
Options	Remote Control Gear
Ballast	MH350W

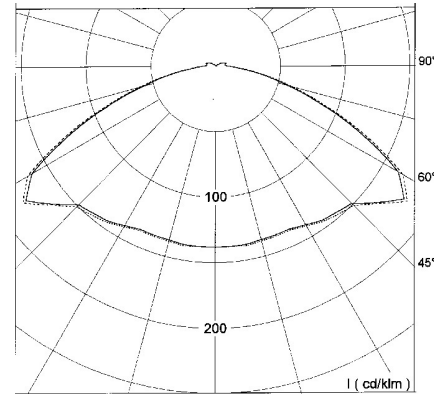

For more information and detailed specifications please visit  
[www.luxtech.com.au](http://www.luxtech.com.au)

or call +61 2 6581 5818  
 94 Orara Lane Mortons Creek NSW Australia 2446